


Metallized Polyester Film Capacitors

100V DC - Axial Type (PE) • Tolerance $\pm 10\%$ @ 1KHz

A range of metallized polyester film capacitors ideal for use in high-performance loudspeaker crossovers and for more general electronics applications.

Particularly suitable when very low DF (less than 1% @ 1KHz) and high current handling are important and when very small capacitance values are required.

Capacitance Value (μF)	Size (mm)				Part Number
	d	L	d \emptyset	s	
0.010	5.0	10.5	0.6	30	U010 V100KPE
0.012	5.0	10.5	0.6	30	U012 V100KPE
0.015	5.0	10.5	0.6	30	U015 V100KPE
0.018	5.0	10.5	0.6	30	U018 V100KPE
0.022	5.0	10.5	0.6	30	U022 V100KPE
0.027	5.0	10.5	0.6	30	U027 V100KPE
0.033	5.0	10.5	0.6	30	U033 V100KPE
0.039	5.0	10.5	0.6	30	U039 V100KPE
0.047	5.0	10.5	0.6	30	U047 V100KPE
0.056	5.0	10.5	0.6	30	U056 V100KPE
0.068	5.0	10.5	0.6	30	U068 V100KPE
0.082	5.5	10.5	0.6	30	U082 V100KPE
0.10	5.5	10.5	0.6	30	U100 V100KPE
0.12	6.0	10.5	0.6	30	U120 V100KPE
0.15	6.5	10.5	0.6	30	U150 V100KPE
0.18	6.0	14.0	0.6	30	U180 V100KPE
0.22	6.0	14.0	0.6	30	U220 V100KPE
0.27	6.5	14.0	0.6	30	U270 V100KPE
0.33	7.0	14.0	0.6	30	U330 V100KPE
0.39	7.5	14.0	0.6	30	U390 V100KPE
0.47	8.0	14.0	0.6	30	U470 V100KPE
0.56	7.5	19.0	0.8	35	U560 V100KPE
0.68	8.0	19.0	0.8	35	U680 V100KPE
0.82	8.5	19.0	0.8	35	U820 V100KPE
1.0	9.0	19.0	0.8	35	1U00 V100KPE
1.2	10.0	19.0	0.8	35	1U20 V100KPE
1.5	10.0	25.0	0.8	35	1U50 V100KPE
1.8	11.0	25.0	0.8	35	1U80 V100KPE
2.2	12.0	25.0	0.8	35	2U20 V100KPE
2.7	13.0	25.0	0.8	35	2U70 V100KPE
3.3	14.0	25.0	0.8	35	3U30 V100KPE
3.9	13.0	32.0	0.8	35	3U90 V100KPE
4.7	14.0	32.0	0.8	35	4U70 V100KPE
5.6	15.0	32.0	0.8	35	5U60 V100KPE
6.8	15.5	32.0	0.8	35	6U80 V100KPE
8.2	18.0	32.0	0.8	35	8U20 V100KPE
10	18.0	47.0	0.8	35	10U00 V100KPE
12	19.5	47.0	0.8	35	12U00 V100KPE
15	21.0	47.0	0.8	35	15U00 V100KPE
18	22.5	47.0	0.8	35	18U00 V100KPE
22	25.0	47.0	0.8	35	22U00 V100KPE
27	27.0	47.0	0.8	35	27U00 V100KPE
30	29.0	47.0	0.8	35	30U00 V100KPE

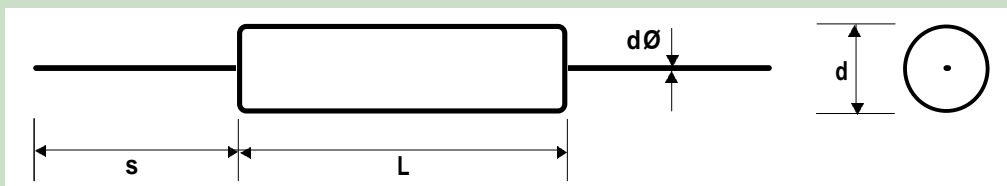

Operating Temperature Range: - 40° C to + 85° C