


Metallized Polyester Film Capacitors

100V DC - Axial Flat Type (PEF) • Tolerance $\pm 5\%$ @ 1KHz

A range of metallized polyester film capacitors ideal for use in high-performance loudspeaker crossovers and for more general electronics applications.

Particularly suitable when very low DF (less than 1% @ 1KHz) and high current handling are important and when very small capacitance values are required.

Capacitance Value (μF)	Size (mm)					Part Number
	L	H	T	d \emptyset	s	
0.10	10.5 x	8.5 x	4.5 x	0.6 x	30	U10 V100JPEF
0.12	10.5 x	8.5 x	4.5 x	0.6 x	30	U12 V100JPEF
0.15	10.5 x	8.5 x	4.5 x	0.6 x	30	U15 V100JPEF
0.18	10.5 x	8.5 x	4.5 x	0.6 x	30	U18 V100JPEF
0.22	10.5 x	8.5 x	4.5 x	0.6 x	30	U22 V100JPEF
0.27	14.0 x	8.5 x	4.5 x	0.8 x	30	U27 V100JPEF
0.33	14.0 x	8.5 x	4.5 x	0.8 x	30	U33 V100JPEF
0.39	14.0 x	9.0 x	5.0 x	0.8 x	30	U39 V100JPEF
0.47	14.0 x	9.0 x	5.0 x	0.8 x	30	U47 V100JPEF
0.56	14.0 x	9.0 x	5.0 x	0.8 x	30	U56 V100JPEF
0.68	14.0 x	9.5 x	5.5 x	0.8 x	30	U68 V100JPEF
0.82	19.0 x	10.5 x	5.5 x	0.8 x	35	U82 V100JPEF
1.0	19.0 x	11.0 x	6.0 x	0.8 x	35	1U00 V100JPEF
1.2	19.0 x	12.0 x	6.5 x	0.8 x	35	1U20 V100JPEF
1.5	19.0 x	13.0 x	7.0 x	0.8 x	35	1U50 V100JPEF
1.8	25.0 x	13.0 x	7.0 x	0.8 x	35	1U80 V100JPEF
2.2	25.0 x	14.0 x	7.5 x	0.8 x	35	2U20 V100JPEF
2.7	25.0 x	15.0 x	8.0 x	0.8 x	35	2U70 V100JPEF
3.3	25.0 x	15.5 x	8.5 x	0.8 x	35	3U30 V100JPEF
3.9	25.0 x	16.0 x	9.0 x	0.8 x	35	3U90 V100JPEF
4.7	32.0 x	17.0 x	10.0 x	0.8 x	35	4U70 V100JPEF
5.6	32.0 x	18.0 x	11.0 x	0.8 x	35	5U60 V100JPEF
6.8	32.0 x	19.5 x	12.5 x	0.8 x	35	6U80 V100JPEF
8.2	32.0 x	21.0 x	14.0 x	0.8 x	35	8U20 V100JPEF
10	32.0 x	23.0 x	16.0 x	0.8 x	35	10U00 V100JPEF
12	47.0 x	21.0 x	12.0 x	0.8 x	35	12U00 V100JPEF
15	47.0 x	22.0 x	13.0 x	0.8 x	35	15U00 V100JPEF
18	47.0 x	24.0 x	15.0 x	0.8 x	35	18U00 V100JPEF
20	47.0 x	25.0 x	17.0 x	0.8 x	35	20U00 V100JPEF
22	47.0 x	28.0 x	18.0 x	0.8 x	35	22U00 V100JPEF
25	47.0 x	29.0 x	19.0 x	0.8 x	35	25U00 V100JPEF
27	47.0 x	30.0 x	20.0 x	0.8 x	35	27U00 V100JPEF
30	47.0 x	31.0 x	21.0 x	0.8 x	35	30U00 V100JPEF
33	47.0 x	33.0 x	23.0 x	0.8 x	35	33U00 V100JPEF
39	47.0 x	35.0 x	25.0 x	0.8 x	35	39U00 V100JPEF
47	47.0 x	37.0 x	27.0 x	0.8 x	35	47U00 V100JPEF

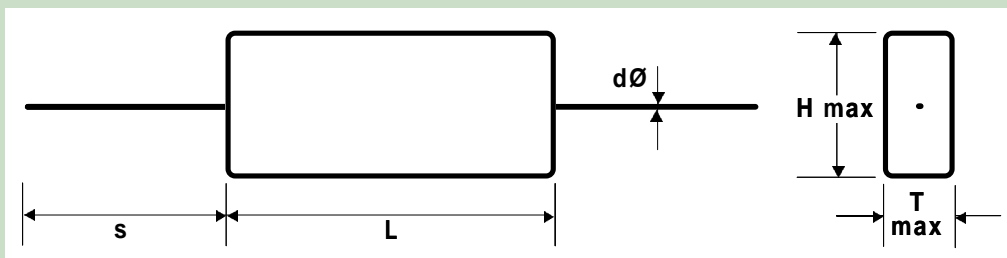

Operating Temperature Range: - 40° C to + 85° C