


Metallized Polyester Film Capacitors

250V DC - Axial Flat Type (PEF) • Tolerance $\pm 10\%$ @ 1KHz

A range of high voltage metallized polyester film capacitors ideal for use in high-power, high-performance loudspeaker crossovers and for more general electronics applications.

Particularly suitable when very low DF (less than 1% @ 1KHz) and high current handling are important and when very small capacitance values are required.

Capacitance Value (μF)	Size (mm)					Part Number
	L	H	T	d \emptyset	s	
0.10	14 x	8.5 x	4.5 x	0.8 x	30	U10 V250KPEF
0.12	14 x	8.5 x	4.5 x	0.8 x	30	U12 V250KPEF
0.15	14 x	9.0 x	5.0 x	0.8 x	30	U15 V250KPEF
0.18	14 x	9.5 x	5.5 x	0.8 x	30	U18 V250KPEF
0.22	19 x	10.0 x	6.0 x	0.8 x	35	U22 V250KPEF
0.27	19 x	11.0 x	6.0 x	0.8 x	35	U27 V250KPEF
0.33	19 x	12.0 x	6.5 x	0.8 x	35	U33 V250KPEF
0.39	19 x	13.0 x	7.0 x	0.8 x	35	U39 V250KPEF
0.47	25 x	13.0 x	7.0 x	0.8 x	35	U47 V250KPEF
0.56	25 x	12.0 x	6.0 x	0.8 x	35	U56 V250KPEF
0.68	25 x	12.5 x	6.5 x	0.8 x	35	U68 V250KPEF
0.82	25 x	13.0 x	7.0 x	0.8 x	35	U82 V250KPEF
1.0	25 x	14.0 x	7.5 x	0.8 x	35	1U00 V250KPEF
1.2	25 x	15.0 x	8.0 x	0.8 x	35	1U20 V250KPEF
1.5	32 x	16.0 x	8.5 x	0.8 x	35	1U50 V250KPEF
1.8	32 x	17.0 x	9.0 x	0.8 x	35	1U80 V250KPEF
2.2	32 x	18.0 x	9.5 x	0.8 x	35	2U20 V250KPEF
2.7	32 x	19.0 x	10.0 x	0.8 x	35	2U70 V250KPEF
3.3	32 x	20.0 x	11.0 x	0.8 x	35	3U30 V250KPEF
3.9	32 x	21.0 x	12.0 x	0.8 x	35	3U90 V250KPEF
4.7	47 x	21.0 x	11.0 x	0.8 x	35	4U70 V250KPEF
5.6	47 x	22.0 x	12.0 x	0.8 x	35	5U60 V250KPEF
6.8	47 x	23.0 x	13.0 x	0.8 x	35	6U80 V250KPEF
8.2	47 x	25.0 x	15.0 x	0.8 x	35	8U20 V250KPEF
10	47 x	26.5 x	16.5 x	0.8 x	35	10U00 V250KPEF
12	47 x	28.0 x	18.0 x	0.8 x	35	12U00 V250KPEF
15	47 x	30.0 x	20.0 x	0.8 x	35	15U00 V250KPEF
18	58 x	31.0 x	21.0 x	1.0 x	35	18U00 V250KPEF
20	58 x	32.0 x	22.0 x	1.0 x	35	20U00 V250KPEF
22	58 x	33.0 x	23.0 x	1.0 x	35	22U00 V250KPEF
25	58 x	35.0 x	25.0 x	1.0 x	35	25U00 V250KPEF
27	58 x	36.0 x	28.0 x	1.0 x	35	27U00 V250KPEF
30	58 x	38.0 x	28.0 x	1.0 x	35	30U00 V250KPEF
33	58 x	40.0 x	30.0 x	1.0 x	35	33U00 V250KPEF

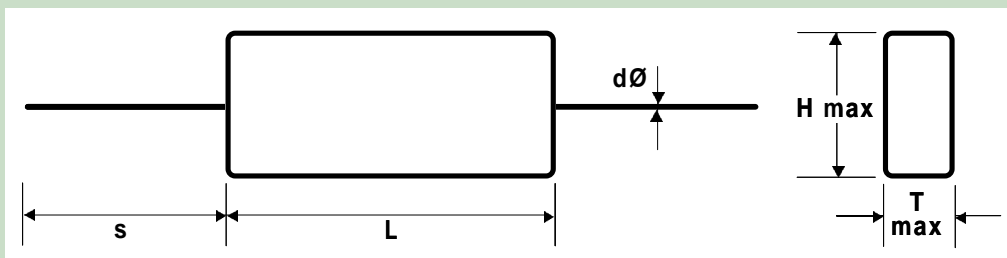

Operating Temperature Range: - 40° C to + 85° C